


"Set-screw"

Concealed Flanges

Technical Page

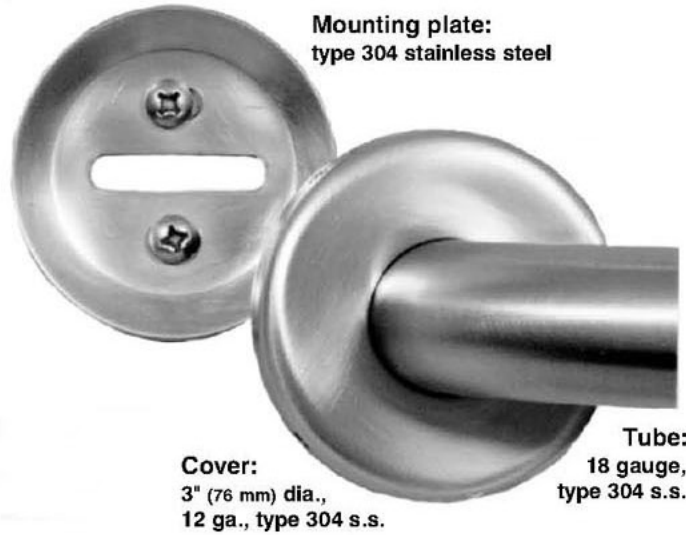

Mounting plate:
type 304 stainless steel

Cover:
3" (76 mm) dia.,
12 ga., type 304 s.s.

Tube:
18 gauge,
type 304 s.s.

The cover is secured by tightening the four rim mounted set-screws. A 3/32" ball nose hex driver speeds the installation of the set-screws.

To specify "set-screw" concealed flanges with specific configurations see the selection code and add " C " to the model number.

