


"Twist-Lock" & Wingits Combo Concealed Flanges

Function #1

Wingits can either use three holes as shown or use the left two holes. The cover shall snap into position firmly through three dimples on the cover.

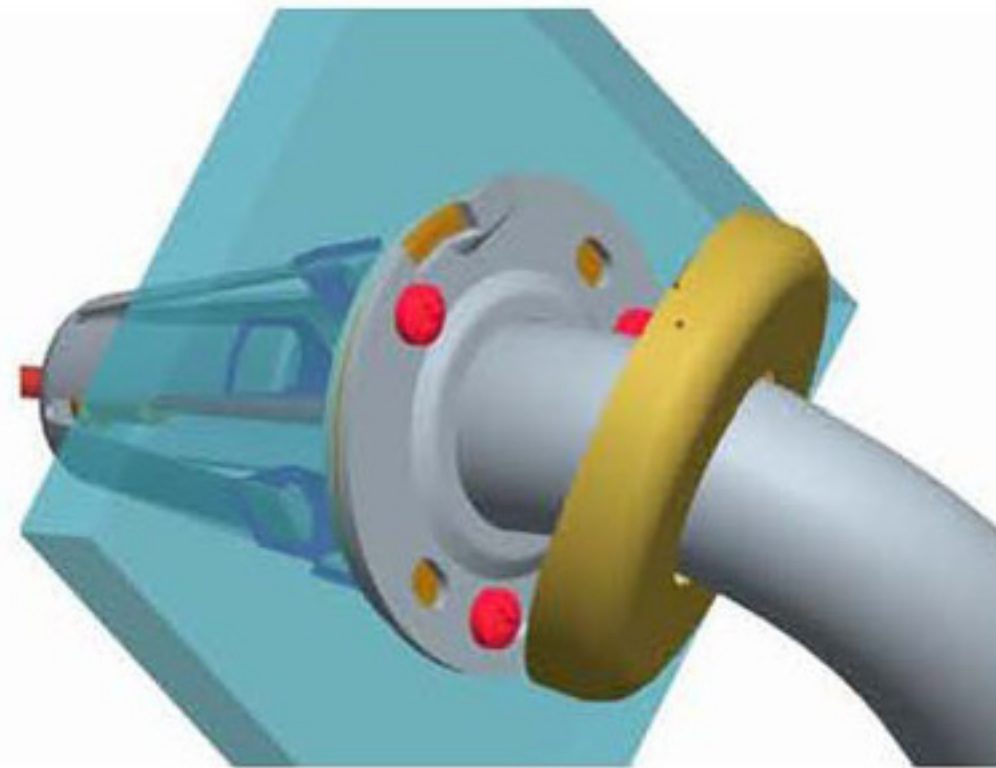

Function #2

The locking tabs on the cover turn 15 degree under the matching wedges on the mounting flange to tighten the cover firmly in place. Hand tightening will secure the cover. (A gripping assist will be required to remove it.)

