



Toll Free 1-866-585-0399

sales@grabbarspecialists.com | www.grabbarspecialists.com

Wall to Floor

*wingit compatible

Configuration 14

Grab Bar
Twist-Lock Concealed

Application Use:

Architectural

Commercial

Institutional

Residential


Specifications

Wall to Floor Safety Bar with snap on/twist-lock concealed flanges. Manufactured by ELCOMA from 18 gauge, type 304 stainless steel, satin finished, tubing. 14 gauge stainless steel mounting flanges, heliarc welded to the tube to form a single structural unit. ELCOMA grab bars are designed, built, and tested to withstand 250lbs. (113kgs) of load when properly installed.* This exceeds HUD, FHA, VA, VA, ADA, ANSI and other federal, provincial, and local codes. *Grab Bars can only be as strong as what they are mounted to. It is imperative when installing any safety product to consult with a qualified contractor to insure you have sufficient backing. For extra support see configuration #15/16



Custom sizes are available to suit special requirements.

The exclusive ELCOMA concealed flange system adapts both "Twist-Lock" and "Snap-On" compatibilities making installation a breeze. ELCOMA Wall to Floor Bars come in 1.25" & 1.5" Diameters with a variety of finishes & coatings.

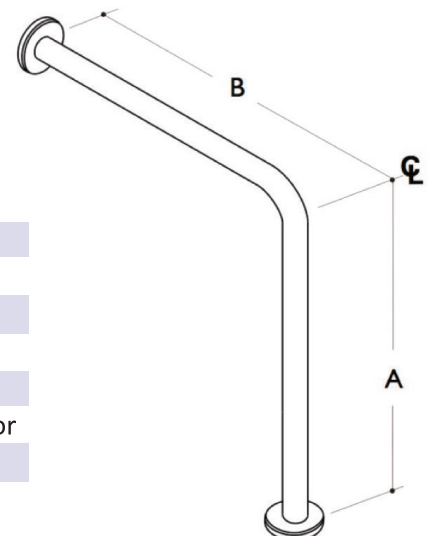

Bar Diameter:	1.25" & 1.5"
Bar Grip:	Smooth, Peened, Knurled, Shur-Grip (available in 1.25" only)
Standard Flange:	Twist-Lock / Snap-On concealed *Wingit compatible
Optional Flange:	Bolt, Exposed & Female Thread Insert
Standard Finishes:	Satin Finish, White or Almond Powder Coating
Custom Finishes:	Multiple colors & finishes available, call your representative or visit www.elcoma.com for selection grid
Configurations:	Standard: 33" x 30"