

## Fold-up Support—adjustable leg

### Item Code and Description

- a. GB1830-WH . . . Fold-up Support—adjustable leg (white)

### General Product Description

- a. a steel, U-shaped bar with hinge that allows support to swing up and down
- b. adjustable leg allows height variance to suit user
- c. mount to a wall
- d. install where no side wall is available for mounting a standard grab bar
- e. commonly installed near a toilet to allow unhindered entry and exit while providing user nearby support

### Physical Characteristics

- a. made of steel with rust inhibitor treatment
- b. epoxy-resin coated
- c. bar diameter: 1¼"
- d. overall projection from wall: 30<sup>3</sup>/<sub>8</sub>"
- e. mounting plate dimensions: 12<sup>3</sup>/<sub>4</sub>" × 4"
- f. range of height to top of bar: 26<sup>1</sup>/<sub>2</sub>" to 34<sup>1</sup>/<sub>4</sub>"
- g. height adjustable in <sup>3</sup>/<sub>4</sub>" increments
- h. color: white
- i. supplied with toilet paper holder (clamp-on gray plastic)
- j. installation hardware not included

### Performance Characteristics

- a. fold support up or down as needed
- b. support engages a retaining clip to remain in the upright position
- c. when folded upright, support allows unhindered access to a fixture (toilet, sink, or bathtub, for example)
- d. when folded down, support provides a sturdy handhold for balance and leverage
- e. typically installed where access flexibility is required and a wall is unavailable to position a grab bar
- f. U-shape allows many options for gripping and leveraging support
- g. rated for 440 lb. load when properly installed
- h. installation requires substantial, well secured blocking in or on wall
- i. use ¼" dia. fasteners to mount support to wall blocking (fastener type and length vary depending on wall materials, thickness of wall, and other factors); stainless steel fasteners recommended in wet area locations



### Compliance

- a. meets ICC/ANSI ASTM 117.1 standard
- b. ADA compliant
- c. passed ASTM B117-87 salt spray test

### Other Information

- a. 5-year limited warranty when installed in commercial settings
- b. 10-year limited warranty when installed in residential settings
- c. see AKW warranty for details

Fold-up Support—adjustable leg

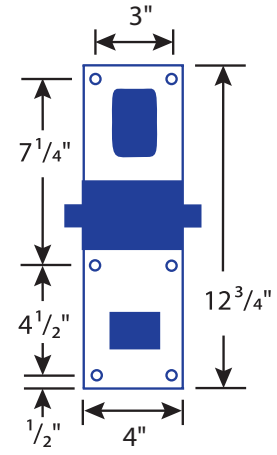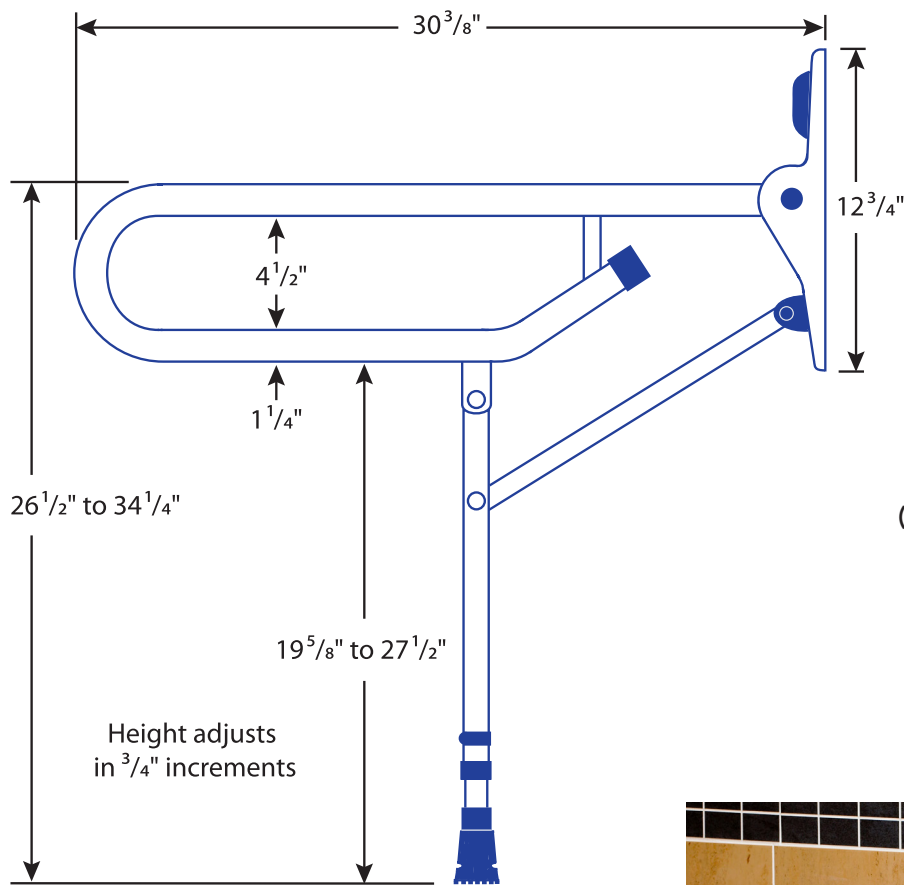

Mounting Bracket  
(support removed for clarity)

