




AMERICAN SPECIALTIES, INC.

MODEL No: 6452

ISSUED: 1-87

REVISED: 9-04-

RECESSED PAPER TOWEL DISPENSER

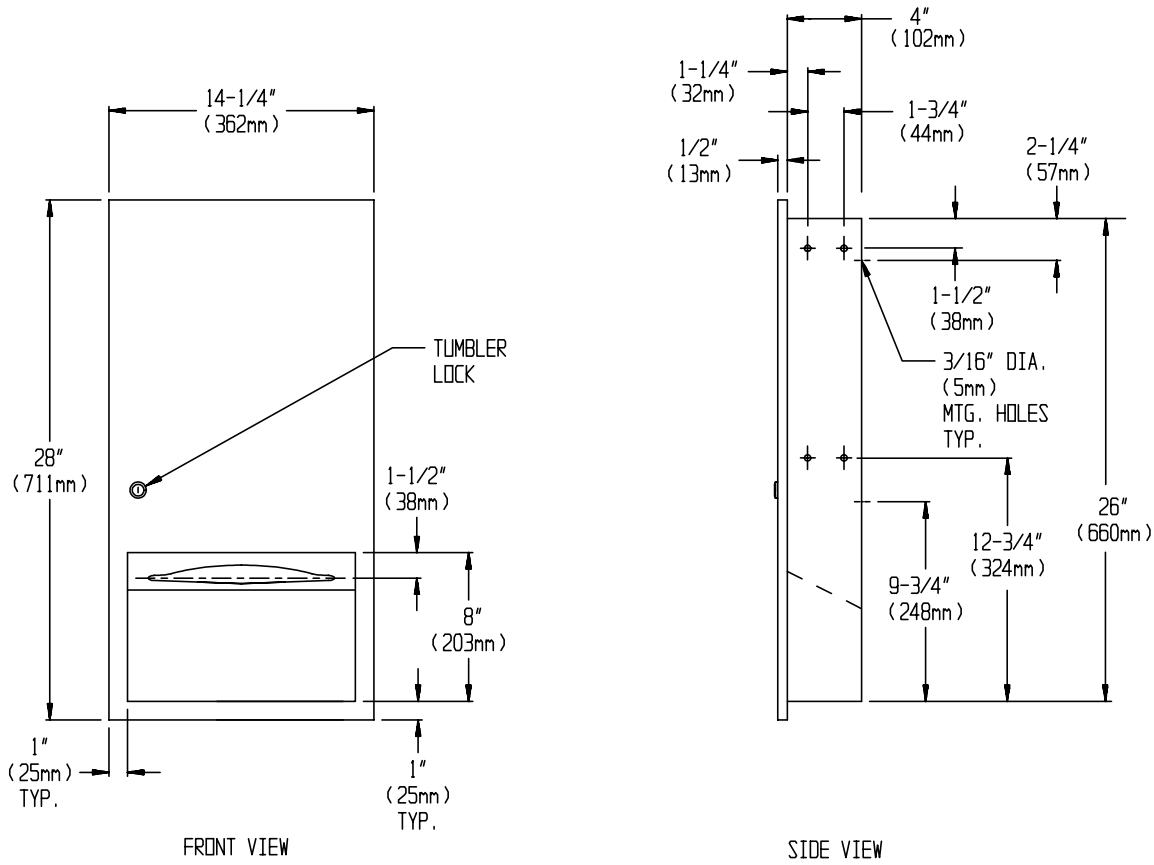

SPECIFICATION

Recessed Paper Towel Dispenser shall hold and dispense 800 standard multi-fold or 600 standard C-fold paper towels. Towel dispenser, door, frame and cabinet shall be fabricated of alloy 18-8 stainless steel, type 304. Cabinet shall be 20 gauge with a 1" (25mm) wide perimeter trim to lay flat against wall. Full face door shall be 18 gauge formed from one piece with no mitres, welding or open seams on face with a 1/2" (13mm) return to wall and shall be attached to cabinet at side with a full length 3/16" dia. (5mm) stainless steel multi-staked piano hinge and be held closed with a tumbler lock keyed alike to other ASI washroom equipment. Towel dispensing slot shall have a fully hemmed-in rolled edge for snag-free dispensing and user safety. Structural assembly of all components shall be of welded construction. All exposed surfaces shall be N^o 4 satin finish and shall be protected during shipment with a PVC film easily removable after installation.

INSTALLATION

Unit is mounted in wall recess using N^o 10 self tapping screws (by others) through concealed mounting holes provided. For compliance with ADA Accessibility Guidelines, unit should be installed so that towel dispenser slot is 54" (1372mm) maximum above finished floor (AFF) if clear floor side reach access is provided or 48" (1219mm) maximum AFF if clear floor forward reach access only is provided. For general utility mount unit 42" (1067mm) from top of finished floor to bottom of unit.

Rough Wall Opening (RWO) required is..... 12-3/4" W x 26-1/2" H x 4-1/4"D minimum (324mm x 673mm x 108mm)

OPERATION

Towels are self-feeding until supply is depleted. Unit may be reloaded with a partial load in-place and will continue to feed properly. Locking door prevents unauthorized access or removal.

Accessory Specialties

AMERICAN DISPENSER

Desert Ray Products

WATROUS INC.