



GRAB BAR SPECIALISTS



Toll Free: 1-866-585-0399

sales@grabbarspecialists.com

www.grabbarspecialists.com

## Wave Grab Bar – 36"

Stainless steel screws for wood backing and 4 hollow wall togglers included with every bar!

*\*Wingit compatible (wingits sold separately)*

LL – 2090 Series

Wave  
Grab Bar  
36"

### Application Use:

Architectural

Commercial

Institutional

Residential


### Specifications

The Wave Grab Bar is manufactured using high quality 18 gauge 1.25" diameter 304 stainless steel.

Convenient mounting flange post with set screws allow for easy flange access during installation yet preserving the clean finished look of the concealed flange cover. Using a wingit compatible flange base and 5 optional screw hole ports makes locating on a stud or hollow wall even easier than ever. 4 hollow wall togglers included with every bar.

The Life Line Collection has been designed, built, and tested to 500lbs exceeding HUD, FHA, VA, ADA, ANSI and other federal, provincial, and local codes.

\*Grab Bars can only be as strong as what they are mounted to. It is imperative when installing any safety product to consult with a qualified contractor to insure you have the sufficient backing to support the seat.

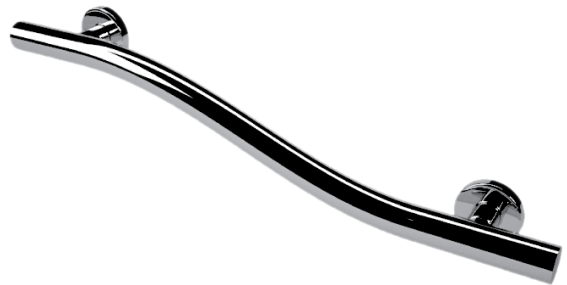

## The Life Line Collection

All Wave Grab Bars ship complete with easy to follow instructions, mounting hardware for stud framing and hollow walls. The Life Line Collection has been designed, built and tested to 500lbs.

The Wave Grab Bar comes in 4 standard finishes and is available in either right hand or left hand orientation.


Also available in 18" & 24" (see LL-2070 & LL-2080)

LL-2090RHSS	SATIN FINISH STAINLESS STEEL
LL-2090RHPC	POLISHED CHROME
LL-2090RHBN	BRUSHED NICKEL
LL-2090RHORB	OIL RUBBED BRONZE

**Change RH to LH for Left Hand Orientation**

LL-2090 Series - 36" (Right Hand Shown)

also available in 18" LL-2070 & 24" LL-2080

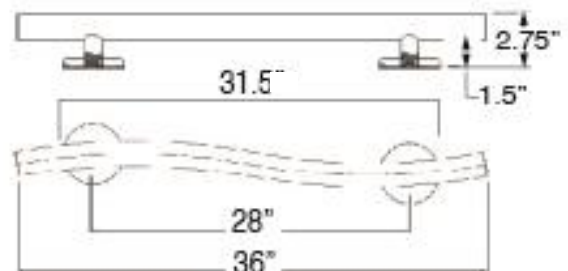

Easy to mount flange!

3 Set Screws on post allow pre-mounting to the wall before attaching the bar.



Dimension tolerances +/- 3/16"