

Adult HDP Folding Shower Seats

"L" shape with Legs (RH/LH)

Configuration:

60/61 Series
with legs

Application Use:

Architectural

Commercial

Institutional

Residential

Specifications

Folding shower seat manufactured by GBS from 1" (25mm) diameter, 18 gauge and 1.25" x 1.25" (32mm x 32mm), 16 gauge, type 304 stainless steel tubing with #4 satin finish. Wall mount brackets shall be 12 gauge type 304 stainless steel. Solid HDPE seat shall be 1/2" (13mm) thick and shall be mildew resistant. Shower Seat shall comply with all applicable federal, provincial and local building safety codes.

HDP - High Density Polyethelene marine grade polymer is an industry standard to withstand the harshest marine conditions. It will not rot or delaminate and is easy to clean.


**** RIGHT HAND SHOWN, LEFT HAND OPPOSITE ORIENTATION ****



Custom sizes are available to suit special requirements.

26" x 21" (660mm x 533mm)	White HDP	Model # 60-PO2620WLEG
28" x 21" (711mm x 533mm)	White HDP	Model # 60-PO2820WLEG
30" x 21" (762mm x 533mm)	White HDP	Model # 60-PO3020WLEG
32" x 21" (812mm x 533mm)	White HDP	Model # 60-PO3220WLEG
34.5" x 21" (876mm x 533mm)	White HDP	Model # 60-PO34520WLEG

Model #61 - (for left hand)

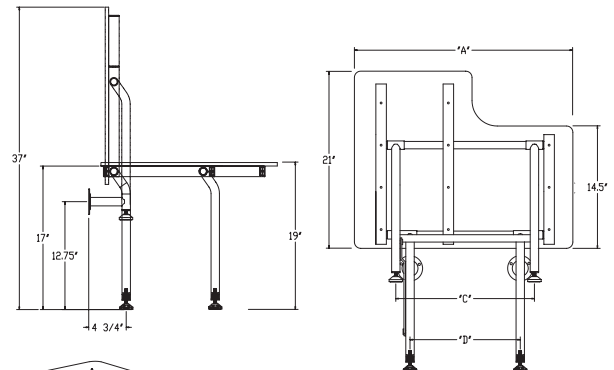

60= Right Hand (shown)
61= Left Hand (opposite)

SEAT SIZE	"A"	26	28	30	32	34.5
LEG WIDTH "C"		16.4	18.4	20.4	22.4	24.9
LEG WIDTH "D"		13.1	15.1	17.1	19.1	21.6

GBS Shower Seats have been designed and tested to withstand 600lbs. (272kgs) of load when properly installed.* This exceeds HUD, FHA, VA, ADA, ANSI and other federal, provincial and local codes. *Shower seats can only be as strong as what they are mounted to. It is imperative when installing any shower seat to consult with a qualified contractor to insure you have sufficient backing.

