




AMERICAN SPECIALTIES, INC.
441 Saw Mill River Road, Yonkers, NY 10701 (914) 476-9000

MODEL No: 0482

ISSUED: 1-87

REVISED: 4-03

RECESSED SEAT COVER AND TOILET PAPER DISPENSER WITH SANITARY DISPOSAL

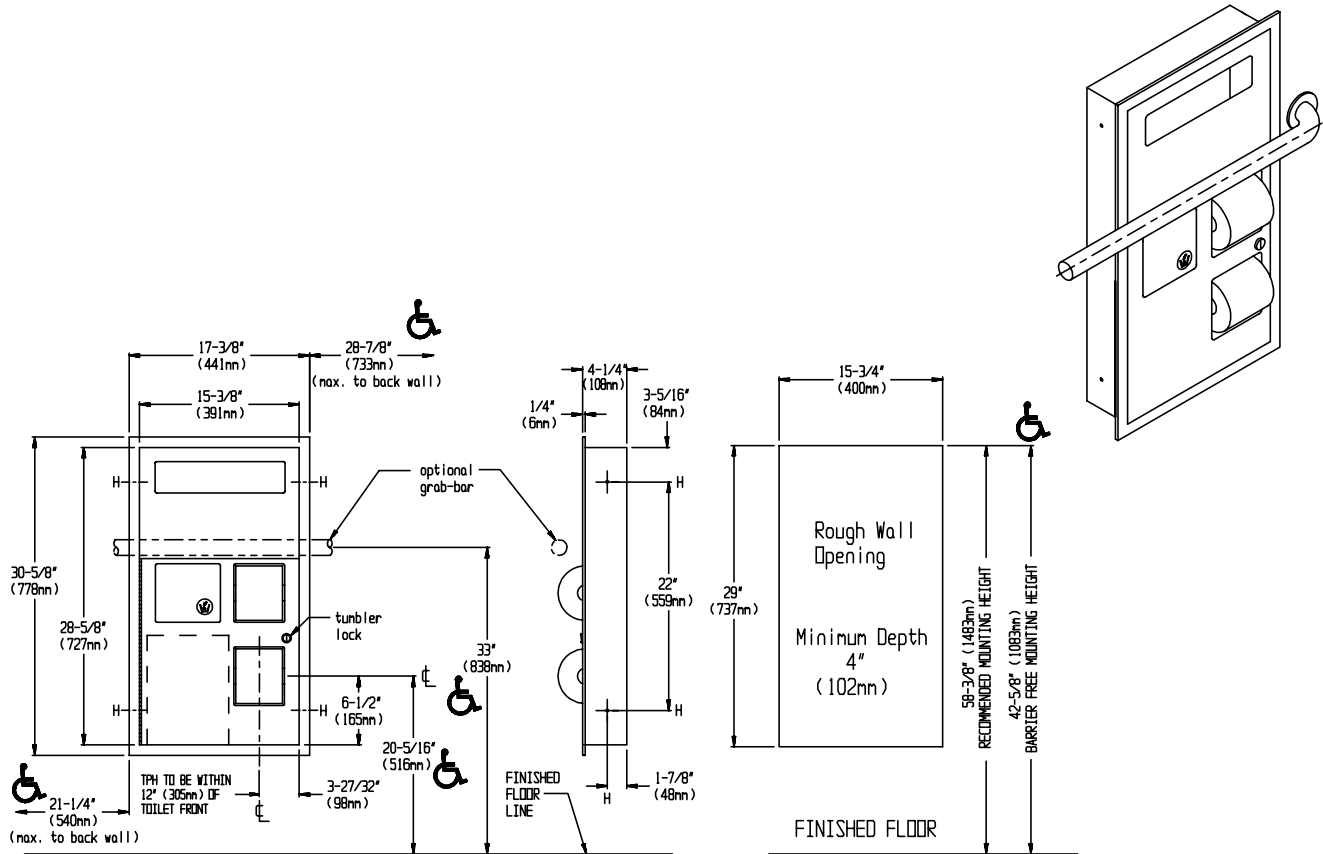

SPECIFICATION

Recessed Seat Cover and Toilet Paper Dispenser with Sanitary Napkin Disposal shall hold and dispense 1000 paper seat covers and two rolls standard or 1800 sheet 4-1/2" x 5-1/4" (114mm x 133mm) toilet paper. Removable waste container shall have a capacity of 1.2gal (4.5 liters). Seat dispenser panel and toilet paper dispenser door shall be fabricated of alloy 18-8 stainless steel, type 304, 18 gauge; face frame and cabinet shall be 22 gauge; all exposed surfaces shall have N° 4 satin finish and be protected by a plastic PVC film easily removed after installation. Seat cover cut-out shall have a fully deburred edge for snag-free dispensing and user safety. Disposal door shall be hung on spring tensioned hinges and shall have international graphic symbol. Toilet paper dispenser/disposal door shall be attached to cabinet at side with a full length 3/16" (5mm) dia. stainless steel multi-staked piano hinge and shall be held closed with a tumbler lock keyed alike to other ASI Washroom Equipment. Face trim shall be 1" (25mm) wide formed from one piece with no mitres, welding or open seams and have 1/4" (6mm) square return to face of wall. Structural assembly of all components shall be of welded construction. Cabinet shall include two theft resistant toilet paper spindles and removable stainless steel disposal receptacle.

INSTALLATION

Unit is mounted in wall recess using four (4) N° 10 self tapping screws (by others) through concealed mounting holes provided. Note that top of rough wall opening is 13/16" (21mm) below top of unit.

Rough Wall Opening required is15-3/4" W x 29" H x 4" D. minimum (400mm x 737mm x 102mm)

OPERATION

Seat covers are self-feeding until supply is depleted. Toilet paper rolls feed freely until depleted, level of supply is constantly visible. Disposal container is emptied manually on cycle determined by maintenance needs. Toilet paper rolls, paper seat covers and disposal are serviced by unlocking and opening door.